

Veritas 8

BEST SELLING STAND ALONE CONTROL PANEL



THANK YOU FOR VOTING TEXECOM



NEW FEATURES

Already renowned for its reliability, the Veritas 8™ has been upgraded with a host of new features. Installation and servicing are now even faster. Operation is quicker and easier. Programming has been both simplified and extended. Outstanding features include:

- ✓ 8 FULLY PROGRAMMABLE ZONES PLUS TAMPER
- ✓ SERVICE TIMERS (DATE PROGRAMMABLE)
- ✓ 2 PROGRAMMABLE PART SET SUITES
- ✓ KEYPAD PA OPTION (PRESS ③ & ⑨ TOGETHER)
- ✓ ACCEPTS UP TO SIX BACKLIT LED REMOTE KEYPADS
- ✓ SINGLE BUTTON QUICK SET OPTION
- ✓ LATCHING WALK TEST MODE
- ✓ SOAK TEST SUITE
- ✓ KEY SWITCH FACILITY
- ✓ SINGLE BUTTON CHIME

Ask your distributor today for the new Texecom 28 page full colour Product Guide.

Texecom
www.texe.com

NEW FEATURES


MORE FEATURES MORE FLEXIBILITY MORE OPTIONS MORE PROGRAMMABILITY

- ✓ RESET BUTTON CANCELS SETTING OPTION
- ✓ SILENT PART SET CONFIRMATION TONE OPTION
- ✓ RESTORE FACTORY SETTINGS FROM PANEL AS WELL AS REMOTE KEYPAD
- ✓ QUIET ENTRY TONE ON PART SET
- ✓ DISABLE MANUAL OMIT ON SELECTED ZONES
- ✓ SEPARATE BELL & AUXILIARY FUSES
- ✓ SW+ OUTPUT CAN POWER DETECTORS DIRECTLY
- ✓ LATCHING SENSOR AUTOMATIC & MANUAL RESET
- ✓ ZONE DISABLE SUITE
- ✓ BELL BOX HOLD-OFF MODE (FOR EASIER SERVICING)
- ✓ PROTECTED ENGINEER CODE OPTION
- ✓ ALL 24 HOUR ZONES DISABLED IN ENGINEER MODE
- ✓ EN 50131-1 REQUIREMENTS OPTION
- ✓ EN 50131-6 POWER SUPPLY DESIGN
- ✓ INDEPENDENTLY CERTIFIED TO EN 50130-4 EMC

VERITAS CONTROL PANEL SERIES

Veritas 8

BEST SELLING STAND ALONE CONTROL PANEL

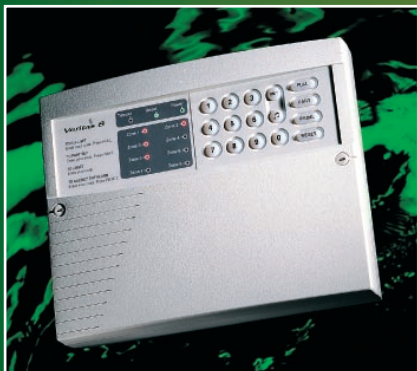

Veritas 8Compact

NOMINATED FOR PRODUCT OF THE YEAR 2000



Veritas R8/R8Plus

BEST SELLING CONTROL PANELS
WITH LED REMOTE KEYPAD



Veritas Excel

NEW CONTROL PANEL WITH
LCD REMOTE KEYPAD



The Veritas R8 Plus now accepts the Veritas Excel LCD remote keypad. This can be used as an extra keypad or as an engineer's programmer.

The Veritas Excel control panel accepts up to 6 LCD or LED remote keypads.

All endstation panels are available in a 1.2mm steel enclosure.

SPECIFICATION

VERITAS 8 ENDSTATION ELECTRICAL

Current Consumption
Quiescent current <50mA
Alarm current <150mA

Fuses

Mains 230VAc T125mA, 250V, 20mm

Mains 115VAc T250mA, 250V, 20mm

Bell Output Supply 1A max.

Bell Trigger 500mA max.
12V via 1kΩ when high.

Strobe Trigger 500mA max.
12V via 1kΩ when high.

SW +Ve Output 500mA max.
12V via 1kΩ when high

Internal Speaker (50mm, 16Ω)

Adjustable low level volume
≥ 90dB at 1m high level volume

Extension Speakers Minimum load 4Ω

Positive Loop Thresholds (Zones 1 - 8)

Minimum open resistance 70kΩ

Maximum closed resistance 10kΩ

Negative Loop Thresholds (Global System Tamper)

Minimum open resistance 110kΩ

Maximum closed resistance 20kΩ

Loop Response Time

Minimum >200ms, Maximum <800ms

Remote Keypads Up to six

NVM (Non-Volatile Memory) Programming and Log

POWER SUPPLY

Mains Supply Voltage Rating 230VAc/115VAc (±10%)

Maximum Total Current Rating

1Adc at 230VAc/115VAc (±5%).

Ripple <5%

Rechargeable Battery Type Texecom 12V sealed lead acid

ENVIRONMENTAL

Operating Temperature -10°C (+14°F) to +50°C (+122°F)

Storage Temperature -20°C (-4°F) to +60°C (+140°F)

Maximum Humidity 95% non-condensing

EMC Environment Residential/Commercial/Light Industrial or Industrial

PHYSICAL

Dimensions 282mm x 225mm x 80mm

Rechargeable Battery Capacity 1.2 to 7Ah

VERITAS LED REMOTE KEYPAD ELECTRICAL

Operating Voltage 13.7Vdc nominal, 10.0Vdc minimum

Current Consumption <70mA

Volume Dual Level

Back-Light 600mcd typical

Cable 4-Core, up to 100m

Connection Star, Daisy Chain or any combination

ENVIRONMENTAL

Operating Temperature -10°C (+14°F) to +50°C (+122°F)

Storage Temperature -20°C (-4°F) to +60°C (+140°F)

Maximum Humidity 95% non-condensing

PHYSICAL

Dimensions 140mm x 105mm x 35mm

EUROPEAN STANDARDS

Conforms to European Union (EU) Low Voltage Directive (LVD) 73/23/EEC (amended by 93/68/EEC) and Electro-Magnetic Compatibility (EMC) Directive 89/336/EEC (amended by 92/31/EEC and 93/68/EEC). The CE mark indicates that this product complies with the European requirements for safety, health, environmental and customer protection.

BEST MANUFACTURER 2000 & 1999 INTRUDER ALARM MANUFACTURER OF THE YEAR 2001 & 2000

1st For offering the best quality products at the right prices

1st For reliability & responsiveness

1st For excellence in customer care & service

1st For providing a high level of support & servicing including training & help lines



EASEN

